


Fume Arm

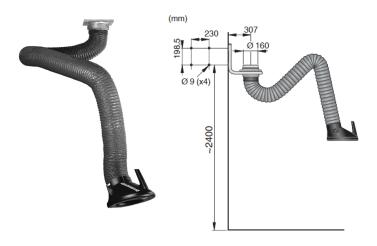

THE FUME ARM

The Fume Arm is designed with ample capacity and has cleared the air in thousands of workspaces for more than 20 years. Its flexible joints make the hood easy to maneuver and locate in the right position.

FEATURES & BENEFITS

The Fume Arm is available in four models which, together with a wide range of accessories, give you almost unlimited opportunities to match its source capture capabilities to your needs. Its flexible joints make the hood easy to maneuver and locate in the right position. You can mount it on a ceiling, wall or bench, or on an extension bracket. The Fume Arm is also often used in combination with fixed or mobile air filters and can be lengthened with an extension arm.

- Easily flexed joints make hood easy to maneuver
- Available in 4 models
- Offering a wide range of accessories
- Mount on ceiling, wall, bench or extension bracket
- · Use in combination with fixed or mobile air filters
- Hoods of all models can be tilted forward, backward and to the side

TECHNICAL DATA

Model	Part No.
2 m (6.7 ft.)	010554235
3 m (10 ft.)	010554335
4 m H (13 ft.)	010554535
4 m V (13 ft.)	010554435
Recommended air flow	800 m3/h (500cfm)
Ducting diameter	160 mm (6.25")
Connection diameter	160 mm (6.25")
Maximum Temperature	70°C (160 °F)

