


GSX Controller



FEATURES & BENEFITS

- NEMA 4X enclosure
- Clear, permanent user instructions right on the box
- Controls pulsing based on filter pressure differential so filters get cleaned only when needed, saving compressed air (energy) and extend filter life
- UL tested and listed
- · CE tested and listed
- 110/220V, 50/60Hz, 1 phase power required
- External Outputs: High pressure alarm and 4-20 mAmp signal for liner pressure readout.

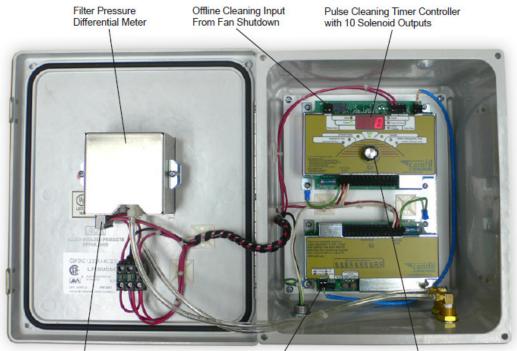

- Pressure Outputs
- 4-20 mA signal
- Cleaning activation
- Alarm output for dirty filters
 Password protected setting is
- Password protected setting is adjustable from front of panel

Expander Board for Additional 10 Solenoid Outputs

User Friendly Control is for Setting Pulse Timing and Offline Cleaning Settings